



Universal input AC-DC Medical and ITE application external desktop switching adapter 20-24 Watts green power single output HEMG26 series



Features

- Energy Efficiency Level VI
- Medical and ITE application
- No load power consumption < 0.1W
- Class I and Class II construction
- CE marking compliance



Specification

Input

Input Voltage	90-264VAC
Input Frequency	47-63Hz
Input Current	Typical 0.37A at 115VAC Typical 0.2A at 230VAC
Inrush Current	8.6Arms at 230VAC
Input Connector	3 pole IEC320-C14(DT7) 2 pole IEC320-C8(DT8)
Earth Leakage Current	Less than 0.25mA
Enclosure Leakage	Less than 0.1mA
No Load Power	Less than 0.1W

Output

Output Connector/Plug	Optional
Line Regulation	Typical 0.4%
Load Regulation	Typical $\pm 1.5\text{--}\pm 3\%$
Total Regulation	Typical $\pm 2\text{--}\pm 4\%$
Noise & Ripple	Typical 1.0% peak to peak
Adjustability	Not available
Hold-up Time	Typical 18mS at 115VAC Typical 76mS at 230VAC

Protection

Over Voltage	Built-in (Latch)
--------------	------------------

Protection

Over Current	Installed
--------------	-----------

General

Efficiency	Typical 86-90% (depending on model)
Switching Frequency	65KHz
Dielectric Withstand	IEC60601-1 and IEC60950-1
Circuit Topology	Fixed Frequency Flyback circuit
Transient Response	Output voltage returns in less than 0.01-0.5mS following a 25% load change
Power Density	1.6-1.9W / Cubic inch

Environmental

Operating Temperature	0°C to +40°C
Storage Temperature	-20°C to +85°C
Cooling	Convection-cooled
Operating Altitude	5000m
Operating Humidity	10-95% RH, non-condensing
Storage Humidity	5-95% RH

Safety/EMC

Emissions	EN55011 & EN55022 / FCC Class B
Safety Standard	IEC60601-1 Class I and Class II IEC60950-1 Class I and Class II

Notes:

- (1) All measurements are at nominal input, full load, and +25°C unless otherwise specified.
- (2) Load regulation is measured at 115VAC or 230VAC in percentage to indicate the change in output voltage as the load varied from half load to full load ($\pm\%$).
- (3) The exact obtainable load regulation depends upon the output cord selected and load current.
- (4) Due to requests in market and advances in technology, specifications subject to change without notice


Output voltage & current rating chart

Single Output

Model No.	AC Inlet	Output Voltage	Output Current
HEMG26-S050400-7	IEC320-C14 (DT7)	5.0V	4.0A
HEMG26-S050400-8	IEC320-C8 (DT8)	5.0V	4.0A
HEMG26-S120200-7	IEC320-C14 (DT7)	12.0V	2.0A
HEMG26-S120200-8	IEC320-C8 (DT8)	12.0V	2.0A
HEMG26-S240100-7	IEC320-C14 (DT7)	24.0V	1.0A
HEMG26-S240100-8	IEC320-C8 (DT8)	24.0V	1.0A

Notes: (1) Other output voltages are available. Please contact sales for details.

Mechanical Dimensions (Note: All dimensions are in mm[inch])

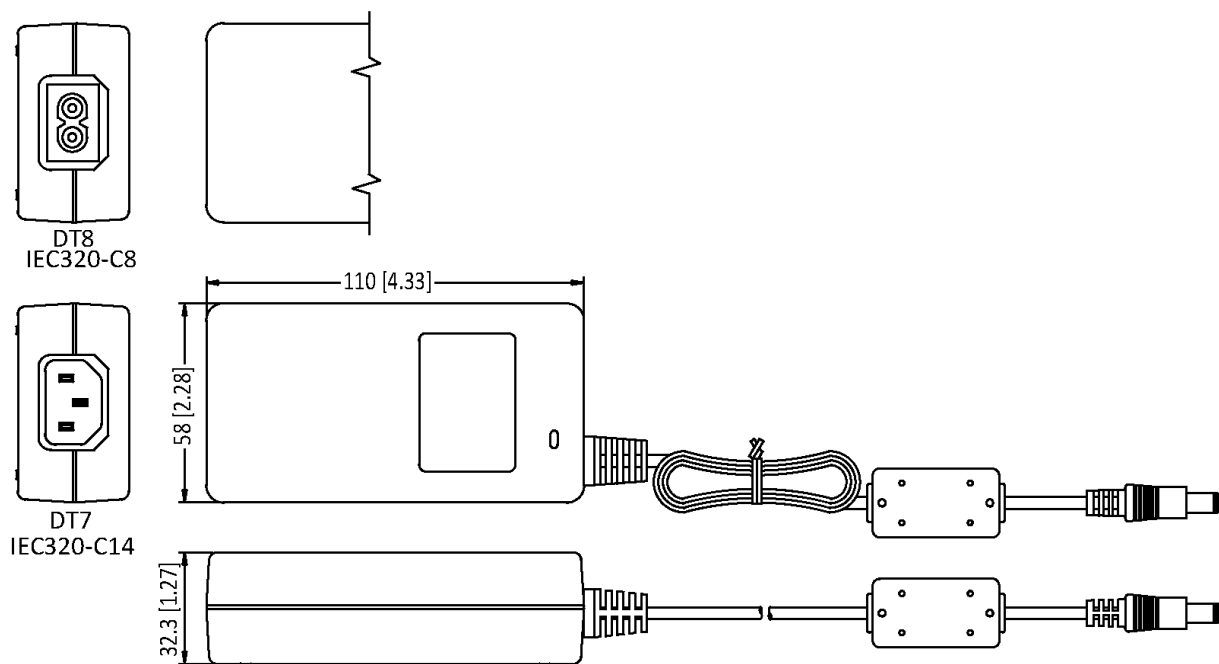

Notes: (1) The length of output cable should be 1000±50mm for 5V-12V and 1500±50mm for 15V-24V.

(2) The drawing for connector is for reference purpose. Optional output connectors are available, please contact sales for details.